


Краны козловые однобалочные с крюком г/п 12,5 т, 20/5 т, 32/8 т

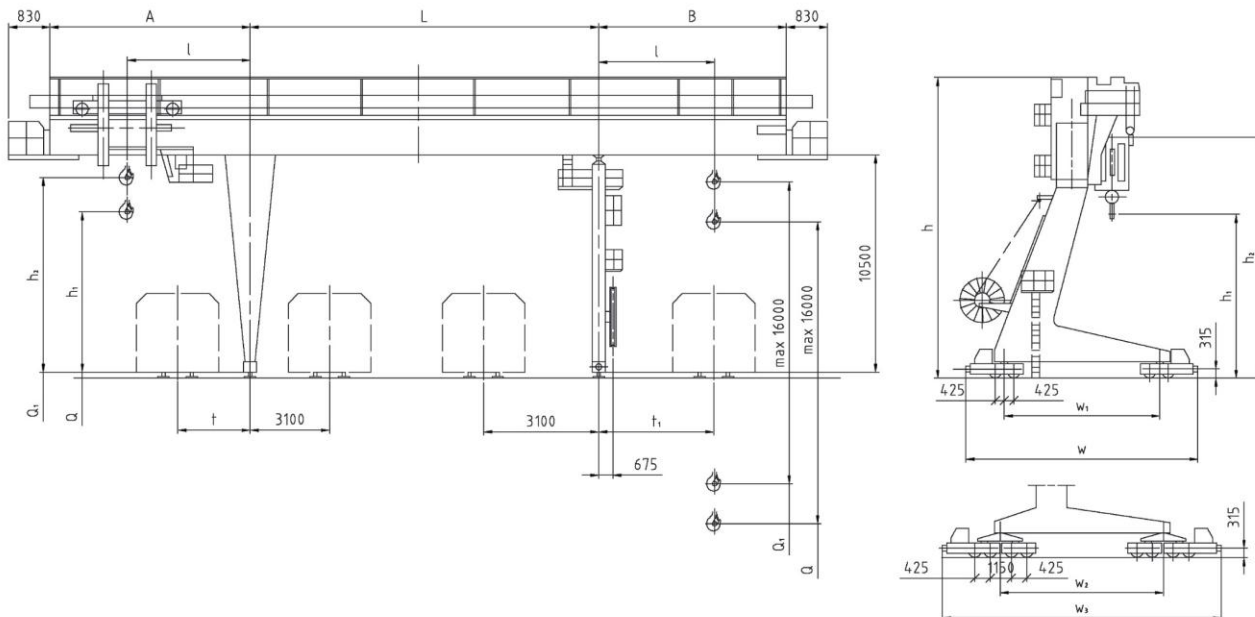

Грузоподъёмность	Пролёт	Режим работы	Макс. расход мощности	Рабочие скорости			
				Основн. подъём.	Вспом. подъём	Тележка	Кран
Q/Q ₁	L	PP	P	V о.п.	V в.п.	V п.т.	V п.к.
T	м		кВт	м/мин			
12,5	32	A5(3м)	55	1-9		5-50	3-32
	40						
20/5	32		102	1-8	1-15	5-45	
	40						
32/8	32		120	0,7-7	1,5-14	4-39	
	40						

Грузоподъёмность	Пролёт			Габаритные размеры										Рекомендуемый тип рельса	
	Q/Q ₁	A	L	B	l	h	h ₁	h ₂	t	t ₁	w	w ₁	w ₂		w ₃
	T	M			mm										
12,5	5,0	32	5,0	2250	14800	11600			3100	3200	11500	6300			
	8,0		8,0	5250											
	10,0		10,0	7250											
	5,0	40	5,0	2250	15000	11800		3100	3200	13400	8000				
	8,0		8,0	5250											
	10,0		10,0	7250											
20/5	12,0	32	12,0	9750	15100	11900	12600		3100	3200	11700	6300			
	5,0		5,0	2000											
	8,0		8,0	5000											
	10,0	40	10,0	7000	15500	12500	12900		3100	3200	13500	8000			
	5,0		5,0	2000											
	8,0		8,0	5000											
32/8	10,0	32	10,0	7000	15600	12000	12800		3100	3200			12050	17550	
	12,0		12,0	9500											
	5,0		5,0	1500											
	8,0	40	8,0	4500	16000	12500	13400		3100	3200		14750	20250		
	10,0		10,0	6500											
	12,0		12,0	9000											

ДОПОЛНИТЕЛЬНЫЕ ТРЕБОВАНИЯ:

Рисунок не определяет конструкцию крана.